

Petroleum products - Determination of the foaming behaviour of lubricating oils


Scope

This International Standard describes a method for determining the foaming behaviour of lubricating oils at a specific temperature.

This standard is applicable to lubricants which are free of additives or which contain additives to reduce the tendency to foam.

Brief description

One part of the sample, tempered to 24°C, is blown through with a constant amount of air for 5 minutes. The amount of foam produced is measured at the end of the air flow and after a rest period of 10 minutes. Then the test is repeated at 93,5°C.

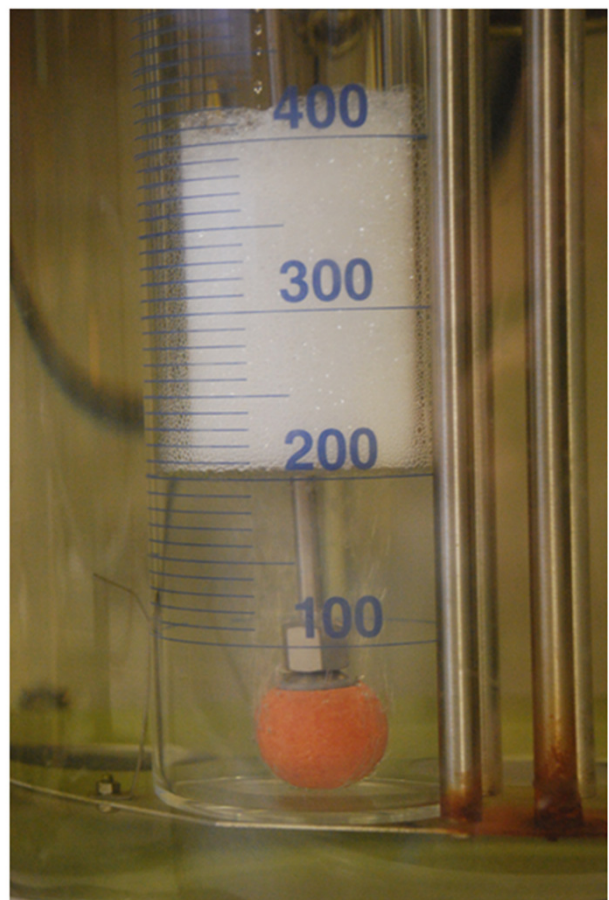

DMT GmbH & Co. KG

Tremoniastraße 13

44137 Dortmund

Tel +49 231-5333-240

Fax +49 231-5333-299

www.dmt-group.com · aps@dm-group.com

